


Envoy Communications Gateway™

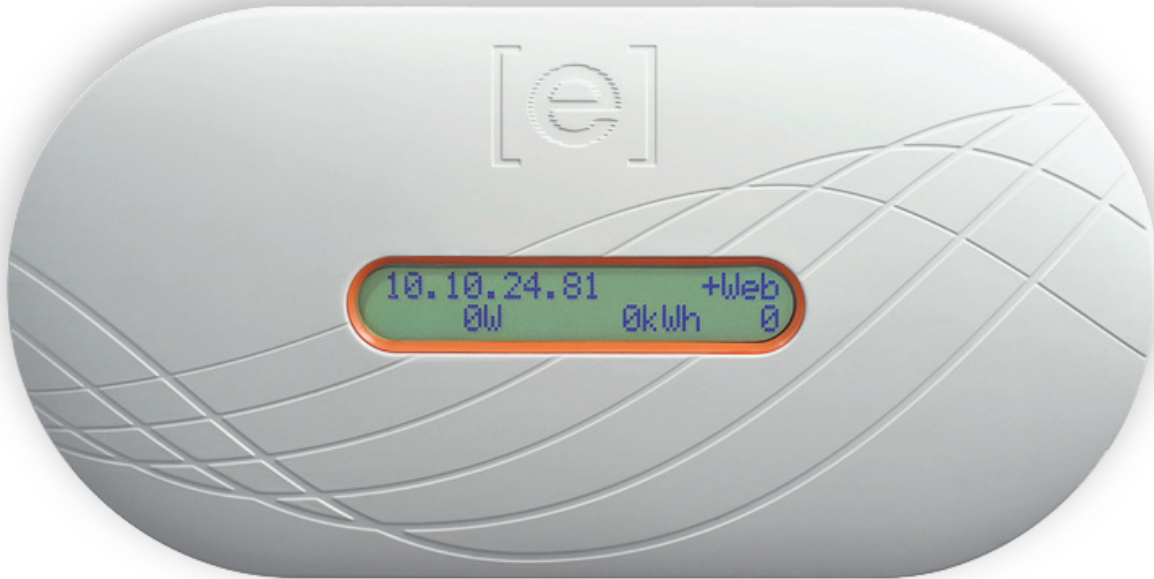

The Enphase **Envoy® Communications Gateway** is the networking hub for the Enphase Microinverter System.

System owners can easily check the status of their solar system using the Envoy's LCD display or they can get more detailed information through Enlighten®, Enphase's web-based monitoring and analysis software, included with purchase of Envoy.

SMART

- Includes web-based monitoring & control
- Integrates with smart energy devices

SIMPLE

- Plug & play installation
- Automatic upgrades & diagnostics

RELIABLE

- 24/7 monitoring & analysis
- Advanced data management & storage

INTERFACE

Power Line Communications	Enphase proprietary
Local Area Network (LAN)	10/100 auto-sensing, auto-negotiating

POWER REQUIREMENTS

AC supply	120 VAC, 60 Hz
Power consumption	2.5 watts typical, 7 watts maximum

CAPACITY

Number of microinverters polled	Recommended up to 500
---------------------------------	-----------------------

For commercial installations, multiple Envoy devices are used in combination with Line Communications Filters (LCF) to separate networking domains across the site.

MECHANICAL DATA

Dimensions (WxHxD)	222.5 mm x 112 mm x 43.2 mm (8.8" x 4.4" x 1.7")
Weight	340 g (12 oz.)
Ambient temperature range	-40°C to +65°C (-40° to 149°F)
Cooling	Natural convection—no fans
Enclosure environmental rating	Indoor NEMA 1

FEATURES

Standard warranty term	One year
Compliance	UL 60950-1, EN 60950-1 FCC Part 15 Class B

Alternate Energy Company

2821 SW. 23rd Ter., Bay #3

Fort Lauderdale, FL, 33312

(954) 358 0501

salesinfo@alternateenergycompany.com

AlternateEnergyCompany.com

To learn more about Enphase microinverter technology, visit enphase.com

