



kestrel
wind turbines

Alternate Energy Company
2821 SW. 23rd Ter., Bay #3
Fort Lauderdale, FL, 33312
(954) 358 0501
salesinfo@AlternateEnergyCompany.com
AlternateEnergyCompany.com

Eveready Diversified Products (Pty) Ltd

www.kestrelwind.co.za

e300ⁱ

Up to 1000 watts of power from a high performance three blade turbine

Affordable clean electricity, adaptable to your needs

Reliable and convenient with a long-life design

Suitable for urban living

Power • Quality • Affordability

Specifications

The next generation e300ⁱ exemplifies the beauty of sophisticated aerodynamic design. The e300ⁱ is compact and unobtrusive making it suitable for urban living. The e300ⁱ is suitable in all wind classes and has a low start-up torque that requires minimal wind to generate energy.

Modern living demands more applications that require energy usage. Every feature of the e300ⁱ optimises renewable energy generation, increasing energy efficiency and cost saving.


Design

The three aerofoil blades, with a diameter of 3.0m, are managed by a passive pitch control system that allows the e300ⁱ to continuously generate usable energy in wind speeds that exceed rated wind speed.

This is one of the factors that contribute to the e300ⁱ being one of the best machines in its class in terms of overall energy harvest on an annualised basis. The e300ⁱ advanced design moderates noise emissions effectively, making it an inconspicuous power source in all installations and environments.

Applications

- Boost solar & other renewable energy installations increasing productivity, reliability & cost effectiveness
- Water pumping systems with optional water pump controller to reduce utility costs
- Continual & reliable power for repeater stations, suitable for the telecommunications industry
- Grid tie applications using approved inverters to reduce energy costs
- Small wind farm installations
- Generate dedicated power for housing, community & health centres not connected to the national grid
- Adaptable to meeting many specific electrical needs

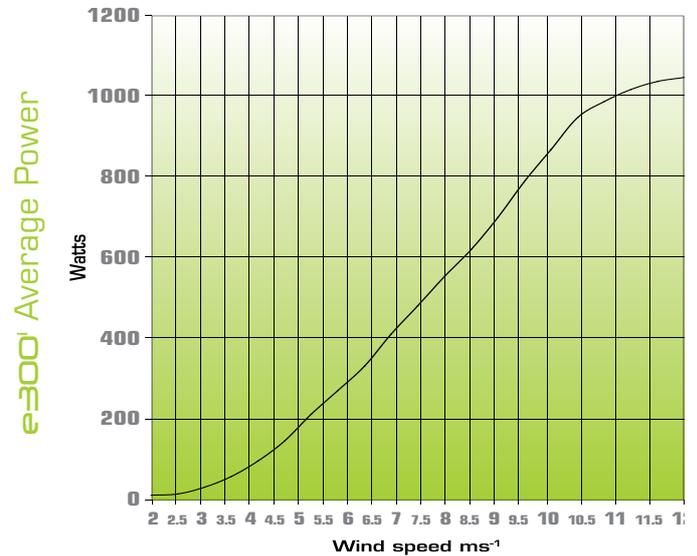

renewable power for life



Small Wind Turbine Class	II
Rated Output	1000W
Maximum Power	1150W at 12ms ⁻¹
Rated Wind speed	10,5ms ⁻¹
Cut-in Wind speed	2.5ms ⁻¹
Generator Type	Permanent-magnet Axial flux brushless
Rotor Diameter	3m
Number of Blades	3
Blade Material	Fibre glass
Tower Top Mass	75kg
Tower Height	9-18m
Tower Type	Scissor or Guyed
Overspeed Protection	Pitch Control
Controller Type	Charge or Dump
Output Voltage	12, 24, 36*, 48, 110* and 200 Vdc
Application	Battery-charging Grid Tie Hybrid Water Pumping

*Available on request

Technical Specifications

Rated output is the optimal power rating of the turbine at the rated wind speed at sea level.

Without a cut-out wind speed power generation is continuous. Rated output is maintained by limiting the output using pitch control in high winds, which prevents over speeding inefficiencies.

The Axial Flux Alternator remains cool while maximum energy is being generated in the form of polyphase high frequency output, reducing inefficiency through energy losses.

The full aerofoil blades are moulded from fibre glass to protect against dust and moisture damage. The e300^o conforms to IEC standards and follows the provisions in the directives IEC61400-2 (small wind turbines).

Kestrel Wind Turbines and its global affiliates and dealers are committed to renewable energy generation as well as reducing the use of fossil fuels. Wind power addresses most of the current issues of present renewable power generation options. Kestrel is continuously developing small wind turbine technology to supply personal or business energy demands.


Kestrel is continuously improving current small wind turbines in the Kestrel range to ensure that the highest quality product is distributed. All Kestrel dealers share these values and are trained to support Kestrel's customers in understanding their power requirements and the local wind resource available to them. Also, to evaluate the turbines in the Kestrel range that best accommodates these requirements, assist installations and advise on maintenance procedures.

Power Generation

Generating your own renewable power is low maintenance as routine maintenance is largely based on visual assessments. Maintenance schedules are designed to suit the local, respective, wind area and power class. With a continuous power rating of 1000W, annual energy harvests can exceed 4500kWh. Energy may be harvested at any wind speed above the cut-in speed and rated output is maintained at any wind speed exceeding the rated wind speed through blade pitch control. Energy output is intrinsically linked to regional wind distribution, topology and altitude as well as tower height. Potential energy harvest is estimated using an average wind speed in order to tailor the most suitable Kestrel wind system to your electrical need.

Results may vary based on wind distribution, topology, tower height and altitude. In order to estimate ones own potential energy harvest an average wind speed can be used to give a fair indication.

Note: Specifications may vary with continuing development and innovation.

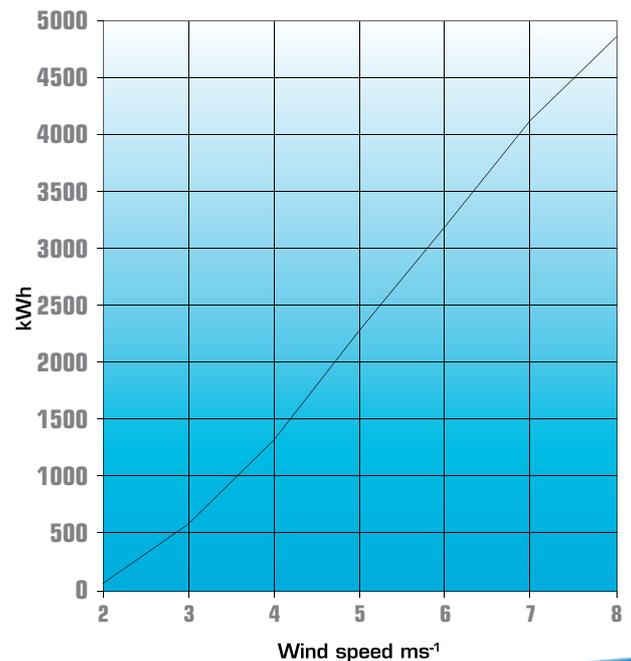

Eveready Road, Struandale, Port Elizabeth, 6001, SOUTH AFRICA
 PO Box 3191, North End, Port Elizabeth, 6056, SOUTH AFRICA

Tel: +27 (0) 41 401 2500 / 2599 • Fax: +27 (0) 41 394 8183
 e-mail: kestrelwind@eveready.co.za • www.kestrelwind.co.za